


# PERFORMANCE CURVE


## SNB 32-160.1 (4 POLE)

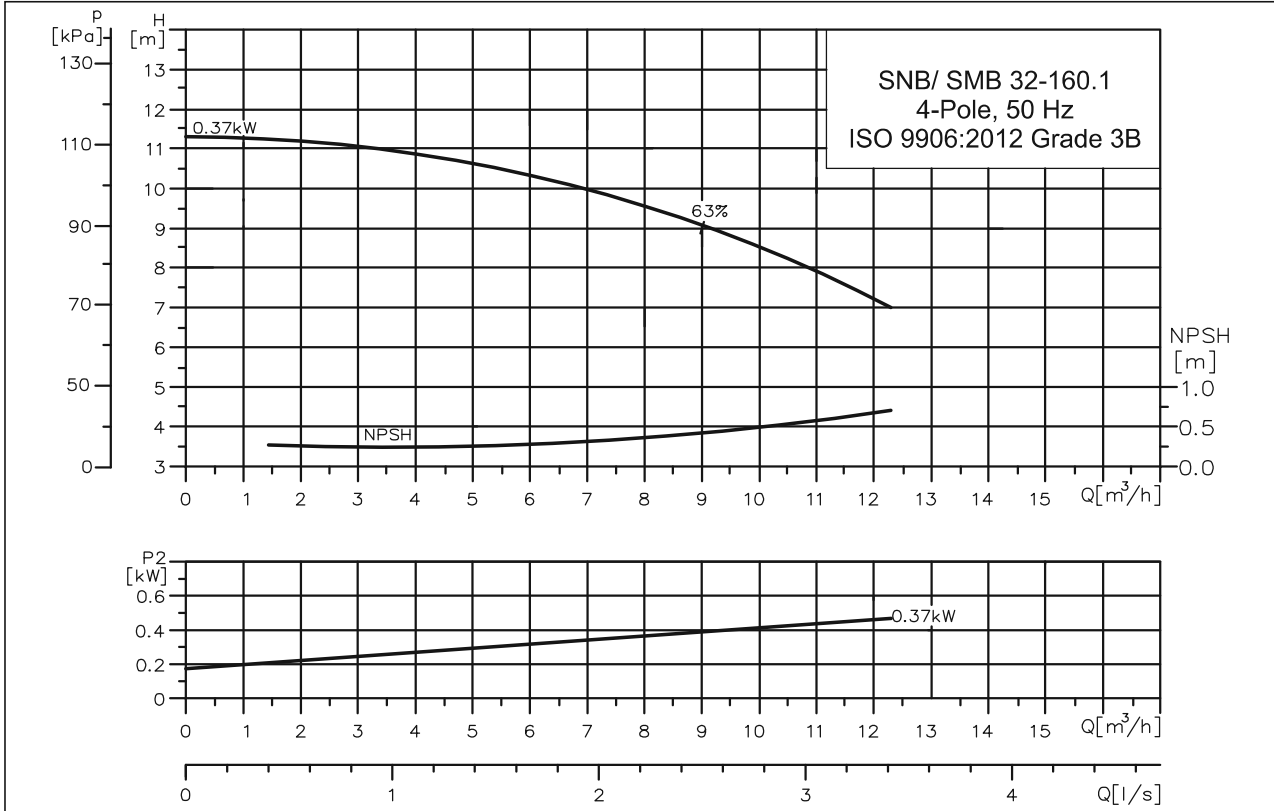

Recommended suction x delivery pipe size :

[kW / H.P.] 0.37/0.5 : 50 x 40 mm

SNB CI

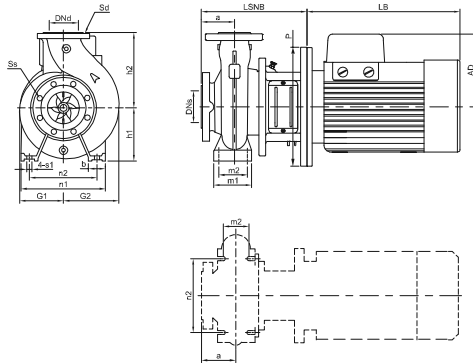

**PERFORMANCE TABLE**

**SNB 32-160.1 (4 POLE)**

Pump type	32-160.1		
Motor type	High Eff.Motor		SMG 71
SNB CI DATA	P <sub>2</sub>	[kW/HP]	0.37/0.5
	PN	[bar]	16
	DNs	[mm]	50
	DNd	[mm]	32
	a	[mm]	80
	h <sub>2</sub>	[mm]	160
	h <sub>1</sub>	[mm]	132
	Ss		4x19
	Sd		4x19
	G <sub>1</sub>	[mm]	120
	G <sub>2</sub>	[mm]	123
	m <sub>1</sub>	[mm]	100
	m <sub>2</sub>	[mm]	70
	n <sub>1</sub>	[mm]	240
	n <sub>2</sub>	[mm]	190
	b	[mm]	50
	s <sub>1</sub>	[mm]	M12
	L SNB	[mm]	201
	LB	[mm]	210
	P	[mm]	160
AD	[mm]	107	
NET WT. (APX.)	[kg]	32	
GROSS WT. (APX.)	[kg]	38	