


PERFORMANCE CURVE

230 GPM


MODEL QF 75

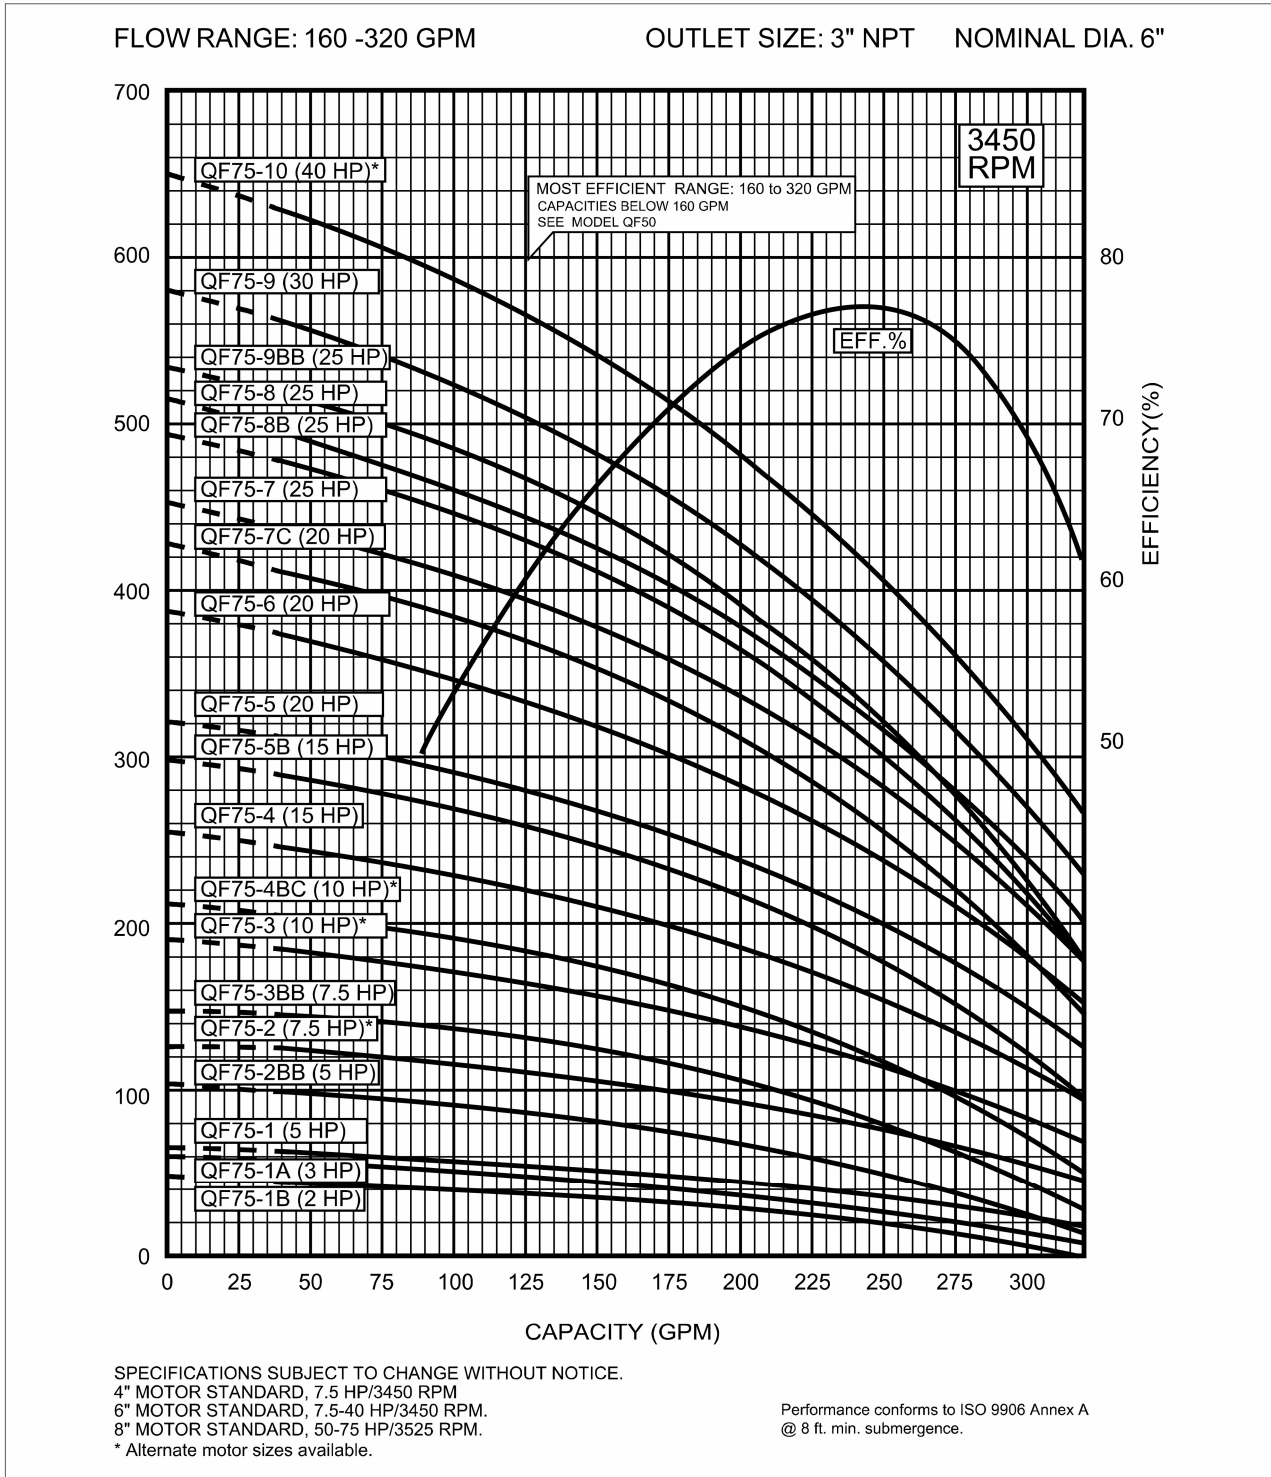

PERFORMANCE CURVE

230 GPM

MODEL QF 75

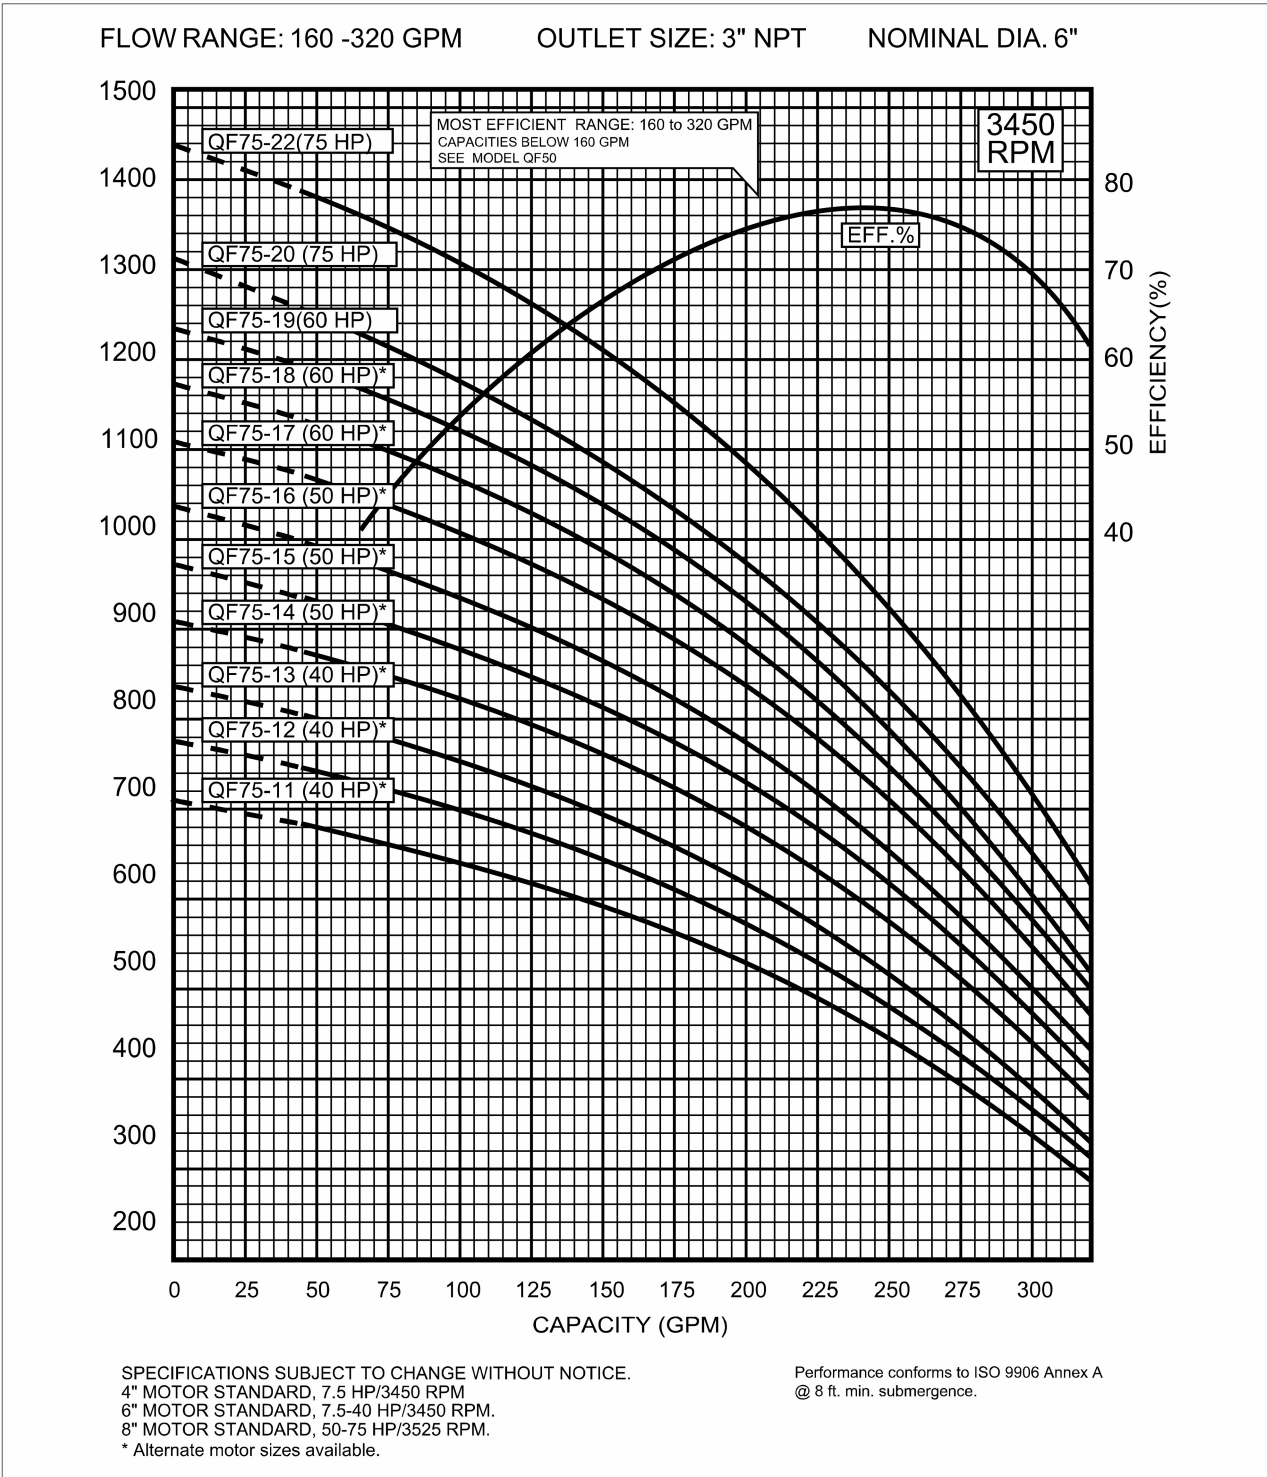

TECHNICAL DATA

230 GPM

MODEL QF 75

DIMENSIONS AND WEIGHTS

MODEL NO.	FIG.	HP	MOTOR SIZE	Ph	DISCH. SIZE	DIMENSIONS IN INCHES					APPROX SHIPPING WEIGHT (lbs)	
						A	B	C	D	E	PUMP	MOTOR
QF75 1 B	A	2	4"	1	3" NPT	30.6	15.9	14.7	3.8	5.7	19	37
				3		30.6	15.9					37
QF75 1 A	A	3	4"	1	3" NPT	35.9	21.2	14.7	3.8	5.7	19	53
				3		35.9	21.2					53
QF75 1	A	5	4"	1	3" NPT	41.9	27.2	14.7	3.8	5.7	19	68
				3		37.5	22.8					57
QF75 2 AB	A	5	4"	1	3" NPT	46.4	27.2	19.2	3.8	5.7	25	68
				3		42.0	22.8					57
QF75 2	A	7.5	4"	3	3" NPT	49.4	30.2	19.2	3.8	5.7	25	77
QF75 2	A	7.5	6"	3	3" NPT	43.4	24.2	19.2	5.4	5.7	25	99
QF75 3 BB	A	7.5	4"	3	3" NPT	53.8	30.2	23.6	3.8	5.7	30	77
QF75 3 BB	A	7.5	6"	3	3" NPT	47.8	24.2	23.6	5.4	5.7	30	99
QF75 3	A	10	4"	3	3" NPT	53.8	32.5	23.6	3.8	5.7	30	84
QF75 3	A	10	6"	3	3" NPT	50.2	25.4	24.8	5.4	5.7	36	108
QF75 4BC	A	10	4"	3	3" NPT	60.6	32.5	28.1	3.8	5.7	35	84
QF75 4BC	A	10	6"	3	3" NPT	54.5	25.5	29.1	5.4	5.7	41	108
QF75 4	A	15	6"	3	3" NPT	57.1	28.0	29.1	5.4	5.7	41	119
QF75 5 B	A	15	6"	3	3" NPT	61.4	28.0	33.3	5.4	5.7	46	119
QF75 5	A	20	6"	3	3" NPT	63.8	30.5	33.3	5.4	5.7	46	132
QF75 6	A	20	6"	3	3" NPT	68.1	30.5	37.6	5.4	5.7	51	132
QF75 7 C	A	20	6"	3	3" NPT	72.4	30.5	41.9	5.4	5.7	55	132
QF75 7	A	25	6"	3	3" NPT	75.1	33.1	41.9	5.4	5.7	55	145
QF75 8 B	A	25	6"	3	3" NPT	79.4	33.1	46.2	5.4	5.7	60	145
QF75 8	A	25	6"	3	3" NPT	79.4	33.1	46.2	5.4	5.7	60	145
QF75 9 BB	A	25	6"	3	3" NPT	83.6	33.1	50.5	5.4	5.7	65	145
QF75 9	A	30	6"	3	3" NPT	86.2	35.7	50.5	5.4	5.7	65	158
QF75 10*	A	40	6"	3	3" NPT	98.1	43.3	54.8	5.4	5.7	70	220
QF75 11*	A	40	6"	3	3" NPT	102.4	43.3	59.1	5.4	5.7	75	220
QF75 12*	A	40	6"	3	3" NPT	106.6	43.3	63.4	5.4	5.7	80	220
QF75 13*	A	40	6"	3	3" NPT	110.9	43.3	67.7	5.4	5.7	85	220
QF75 14*	A	50	6"	3	3" NPT	130.5	58.5	72.0	5.4	5.7	90	308
QF75 15*	A	50	6"	3	3" NPT	134.8	58.5	76.3	5.4	5.7	95	308
QF75 16*	A	50	6"	3	3" NPT	139.1	58.5	80.6	5.4	5.7	99	308
QF75 17*	A	60	6"	3	3" NPT	133.3	48.4	84.8	5.4	5.7	105	416
QF75 18*	A	60	6"	3	3" NPT	137.6	48.4	89.1	5.4	5.7	110	416
QF75 19*	A	60	6"	3	3" NPT	141.8	48.4	93.4	5.4	5.7	114	416
QF75 17	A	60	8"	3	3" NPT	135.8	48.4	87.4	7.5	7.6	113	416
QF75 18	A	60	8"	3	3" NPT	140.2	48.4	91.8	7.5	7.6	119	416
QF75 19	A	60	8"	3	3" NPT	144.7	48.4	96.3	7.5	7.6	124	416
QF75 20**	B	75	8"	3	4" M-NPT	153.5	52.8	100.7	7.5	7.6	131	447
QF75 20**	B	75	8"	3	4" M-NPT	162.4	52.8	109.6	7.5	7.6	140	447

NOTES: All models suitable for use in 6" wells, unless equipped with 8" motor.
 * Alternate motor sizes available.
 ** Built into sleeve, 4" NPT, 8" motor required.

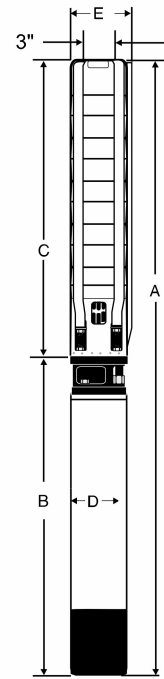


Fig. A

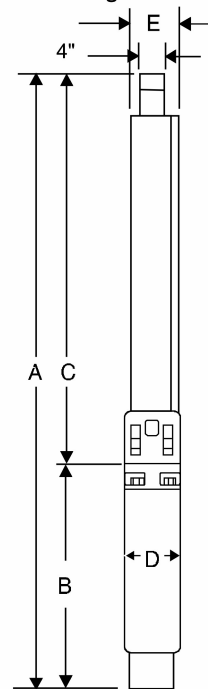


Fig. B